


Una produzione efficiente richiede flessibilità



Versioni con altezza maggiorata



Versioni con sbalzo maggiorato

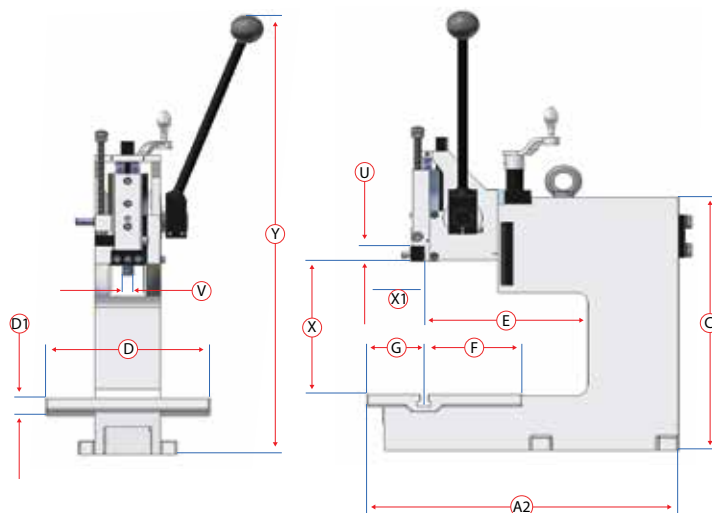

Versioni con sbalzo maggiorato

Quota	HZP 4	HKPV 5	HKPV 8 / 12	HKP/L-DS 4 / 8 / 12 kN	LP 4 / 8 / 12 kN	HKPV 8 / 16	HKP/L-DS 13 / 20 kN	LP 13 / 20 kN	HKP 50	HKP/L-DS 33 / 45 / 56 kN	LP 33 / 45 / 56 kN	LHP 60 kN
A2	380			548			600		670	670	670	522
C	360			507			670			769		
D	200			300			300			340		
d1	17			25			30			31		
E*	200			300			300			300		
F	120			120			130			150		
g	70			85			100			120		
U	21			21			29			49		
V	Ø 10 H7			Ø 10 H7			Ø 15 H7			Ø 25 H7		
X*	130-187			180-245			220-320			230-370		
X1	100	40	45	46	40	58	58	40	15	59	40	50
Ymax	625	748	920	830	1005	1230	1053	1177	1560	1320	1590	1555

* Variazioni di misura vedere pagina 35